


Vis à tête cylindrique (C HC) à six pans creux

DIN 912
ISO 4762
NFE 25-125

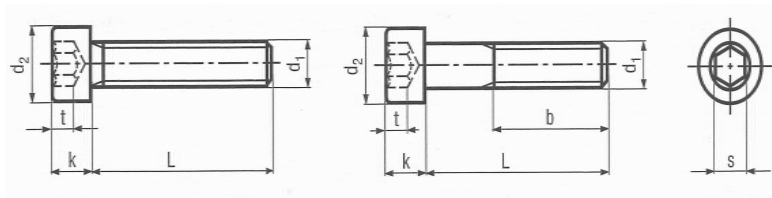

d₁	M3	M4	M5	M6	M8	M10	M12	(M14)	M16	(M18)2)	M20	(M22)2)
d ₂	5,5	7	8,5	10	13	16	18	21	24	27	30	33
b Long. nom. / length	18	20	22	24	28	32	36	40	44	48	52	56
k	3	4	5	6	8	10	12	14	16	18	20	22
s	2,5	3	4	5	6	8	10	12	14	14	17	17
t min.	1,3	2	2,5	3	4	5	6	7	8	9	10	11
Charge d'épr. en N Proof load (N)	2920	5100	8230	11600	21200	33700	48900	66700	91000	115000	147000	182000

d₁	M24	(M27)2)	M30	M36
d ₂	36	40	45	54
b Long. nom. / length	60	66	72	84
k	24	57	30	36
s	19	19	22	27
t min.	12	13,5	15,5	19
Charge d'épr. en N Proof load (N)	212000	275000	337000	490000

GIROTEC
 Le spécialiste de la fixation